


SPECIFICATIONS

Overall Thickness:	5.0mm
Wear Layer:	Micro Reinforced Polymer
Edge Treatment:	Straight Edge
Texture:	Ceramic Textured Finish
Warranty:	10 Year Heavy Commercial Warranty
Adhesive:	CPI Alliance™ and CPI Victory™ are the approved adhesives.
Maintenance:	Neutral Cleaner Only. No applied finishes, strippers or sealants.
Moisture Rating:	Up to 100% Rh when installed with proper adhesive.

SIZES

18" x 18" (45.72cm x 45.27cm)

INSTALLATION

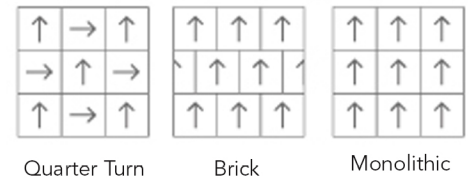

Caution

Condition in at least 19°C (67°F) or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. Evo Floors, LLC will not accept claims where these instructions have not been followed.

TESTING

Test Item		Standard	Results
Level of use		ISO 10874	34, Very heavy commercial
Static load limit		ASTM F970	2,000 psi
Squareness & Straightness		ISO 24342 ASTM F2055	Passes No deviation, ≤0.1mm
Flexibility		ASTM F137	Passes
Dimensional stability		ASTM F2199	Passes
Resistance to chemicals		ASTM F925	Passes, No defects
Resistance to light		ASTM F1515	Passes
Resistance to heat		ASTM F1514	Passes
Fire resistance		ASTM E648	Passes
Smoke density		ASTM E662	Passes
Slip resistance		ASTM E303	R11, Anti-slip tiles, secure for both wet and dry environments
Indoor air quality			Low VOC, Floor Score certified
Sound insulation		ISO 10140	>15db Rating 70, STC Rating 63

MANUFACTURING

ISO 9001 Quality Management System
ISO 14001 Environmental Management System
OHSAS 18001 Occupational Health and Safety Management System

GENERAL INFORMATION

For Pricing, Samples, Warranties, and Installation Guides, please contact us at contact@catalinaproducts.international or call 714-716-1677.

AIR QUALITY

Low VOC
Floor Score
Certification

Certification



CERTIFIED BY
ICC Global Services

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100

